



ELECTRICAL SYSTEM &

INSTRUMENTATION POWER INSTALLATION CONDUITS & FITTINGS

電氣 & 儀表電力安裝管與管件



盟諭實業有限公司
MONG YU ENTERPRISE



06

電線用鋼/鋁管
Rigid Steel/Aluminum
Alloy Conduits

07-08

6R 90°/45°電管彎
6R Normal Bends 90°/45°
正6R 90°/45°電管彎
6R Special Large Bends 90°/45°
3R 90°/45°電管彎
3R Normal Bends 90°/45°

09

NIP外絲短管
Nipples

10

CPL內絲管節
Couplings

11-18

穿線盒
Conduit Outlet Boxes
C/LB/LR/L/L/T/TB/X/LBD

19-20

F*型方形開關盒
F* Type Single Gang Cast
Device Boxes

21-25

G*型防爆圓型接線盒
G* Type Explosionproof
Conduit Round Outlet Boxes

PG*型防水圓型接線盒
PG* Type Waterproof
Conduit Round Outlet Boxes

GS型氣密燈接線盒
GS* Type Outlet Boxes with
Hub Cover

26

ECD排放栓/呼吸器
Drains/Breathers

27

EY/EYD型密封接頭
Sealing Fittings

28

內外牙/全內牙由任接頭
UNY/UNF Unions

29

HUB接線箱接頭
Conduit Hubs

30

LN鎖緊螺帽
Lock Nuts

31

BUI/BUIS型絕緣護線套
Bushings

32

RE型內外牙縮小接頭
Reducers

33

ME型內外絲放大接頭
Enlargers and Adapters

34

直角/平行/沿邊管卡
RA/PAR/EG Clamps

35

ORA型單孔管卡
One Hole Clamps

36

SNB型90°內外絲彎頭
Male-Female 90° Degress
Elbows

37

SEF型防爆金屬軟管
Flexible Conduits

38

進口產品
Import Commodity
I-EXAP防爆粉 Sealing Compounds
I-EXTB導電膏 Conductive Anti-corrosions
I-EXTB1電氣補土 Duct Seals
I-EXID拉線膏 Pulling Lubricants
I-EXK1防爆棉 Sealing Fibbers

39-40

ATM通用型中壁合膠
熱收縮套管
Medium Wall Polyolefin Tubings

42-46

電線保護軟管
Flexible Conduits
KA3/KU/TKA/PKA/PKU

47-54

軟管接頭
Liquidtight Connectors
KM/KF/KEMT
KNB90/KNB45/PKM/PKF

KBUI型管端護套
Guide Collar

56

EMT無螺紋(薄)電線鋼管
EMT Rigid Steel Conduits

EMT喇叭口式盒街頭
Box Connectors

57

EMT管接頭
Couplings
EMT 90°/45°彎管
Normal Bends 90° / 45°

58

EMT直角管夾片
Right Angle Clamps

EMT鋁製接線盒
Aluminum Conduit Outlet Boxes

盟詭實業有限公司成立於1997年，為一專營並製造動力儀電管件、防爆電氣管件、高壓PIPE&TUBE管及管配件、消防空調用管配件與五金材料之公司，產品銷售遍及本國各大石化廠、鋼鐵廠、電力公司、科學園區、捷運等...動力儀電相關工程，迄今已累積了相當之專業經驗。

Established in 1997, Mong Yu Enterprise is a company specializing in the manufacturing of dynamometer electric piping accessories, explosion-proof electrical piping accessories, high-pressure PIPE & TUBE piping and piping accessories, fire-fighting air-conditioning piping accessories, and hardware parts. Our products are sold throughout the country's major petrochemical plants, steel plants, power companies, science parks, MRT, etc., earning substantial professional experiences in dynamometer related engineering projects.

為強化管理與產品生產控管，委由法國標準協會(AFNOR)艾法諾國際股份有限公司認證通過ISO-9001品質管理及ISO-14001環境管理等認證。盟詭公司也致力於防爆相關產品的不斷研發與精進，並於民國一〇五年開始，陸續將自有產品委由德國萊茵TUV驗證機構進行IECEx防爆相關認證，迄今已有多項防爆產品通過IECEx認證。未來盟詭公司將持續本著技術、品質、服務的核心價值，不斷的在產品上創新與研發，堅持對產品品質上的追求，與客戶至上的服務品質。

In order to strengthen the management and production control, we obtained ISO-9001 Quality Management System and ISO-14001 International Environment which were certified by AFNOR Asia of AFNOR GROUP. Also, committed to the continuous research, development and improvement of explosion-proof related products, we have entrusted TÜV Rheinland to test our products for IECEx Certification since 2016, and several of them have successfully obtained it. In the future, Mong Yu Enterprise, which upholds the core values of technology, quality and service, will keep innovating and developing new products based on our insistence on the pursuit of product quality and customer-oriented service quality.

營業產品系列 Product Series

- IEC/UL/TS認證防爆管件
IEC/UL/TS Explosion-proof Fittings
- 電氣&儀表電力安裝管與管件
Electrical System & Instrumentation
Power Installation Conduits & Fittings
- 高壓TUBE & PIPE管與管件
High Pressure Tubes & Fittings
High Pressure Pipes & Fittings
- 消防空調及各式配管安裝管與管件
Firefighting, Air Conditioning and
Various Piping Installation Pipes & Fittings
- 五金產品
Hardware Parts


證書 Certificate



品質證書 Quality Certificates
ISO 9001 : 2015 (CNS12681 : 2016)



環安證書 Environmental Certificates
ISO 14001 : 2015 (CNS14001 : 2016)

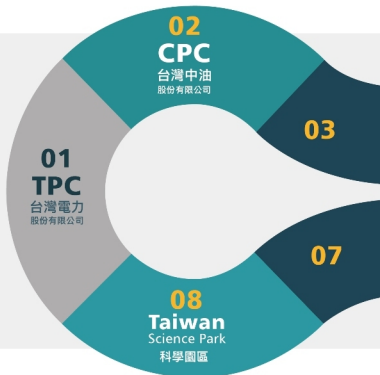

01 台灣電力股份有限公司 TPC

林口電廠

新鼎備電工程
中鼎動力工程
工信煤倉動力工程
工信煤倉備電工程

通霄電廠

中鼎動力工程
中鼎備電工程

大林電廠

中鼎動力工程
中鼎備電工程
現代動力備電工程
日商住友動力備電工程
榮工動力備電工程

02 台灣中油股份有限公司 CPC

林園廠區

108冷卻水塔動力備電工程
第一轉烷化工場
第五丁二烯萃取及第七芳香煙工場
中鼎六輕NC06動力備電工程
十座3000公秉高壓球型槽興建工程

大林廠區

柴油加氫脫硫工場動力備電工場
廢水處理相關設備統包工程
RFCC動力工程
RFCC區外備電工程
G區電氣設備及配電工程
第三、四埧配備電工程
富台第12蒸餾與建動力備電工程
中鼎第11柴油與建動力備電工程

03 台塑企業集團 Formosa Plastics Group


麥寮廠區

LBO動力備電工程
ALO3動力備電工程
OL3動力備電工程
六輕園區碳纖維廠備電工程
SAP廠動力備電工程
中鼎C5動力備電工程
煉三廠MTBE#單元電氣備電工程

04 石化產業 Petrochemical industry

動力、備電、消防工程

亞東石化股份有限公司 OPTC
台灣寶理塑膠股份有限公司 Polyplastics
亞洲聚合股份有限公司 APC
台灣聚乙炔股份有限公司 TVCM
中國人造纖維股份有限公司 CMFC
華夏海灣塑膠股份有限公司 CGPC
東聯化學股份有限公司 OUCC
台灣苯乙烯工業股份有限公司 TSMC

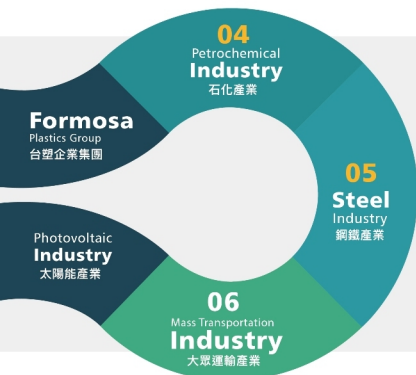

李長榮化學工業股份有限公司 LCY
 信昌化學工業股份有限公司 TPCC
 遠榮氣體工業股份有限公司 YRIG
 台橡股份有限公司 TSRC
 國喬石油化學股份有限公司 GPPC
 長春人造樹脂廠股份有限公司 CCP
 申豐特用應材股份有限公司 Shinfoong

05 鋼鐵產業 Steel industry

動力、備電、消防工程
 中國鋼鐵股份有限公司 CSC
 中龍鋼鐵股份有限公司 DRAGON Steel
 中鋼鉻業股份有限公司 CAC
 豐興鋼鐵股份有限公司 Feng Hsin Steel
 東和鋼鐵企業股份有限公司 Tung Ho Steel

06 大眾運輸產業 Mass transportation industry

水電環控工程、電信工程
 高雄捷運股份有限公司 KRTC
 台北大眾捷運股份有限公司 TRTC

07 太陽能產業 Photovoltaic industry

動力、備電、消防配管工程
 寶德能源科技股份有限公司 Powertec
 廠房太陽能板安裝工程
 中國鋼鐵股份有限公司 CSC

08 科學園區 Taiwan Science Park

機電動力
 (無塵室動力配管、設備機電安裝、
 消防空調電力安裝)
 台灣精緯電路製造股份有限公司 TSMC
 聯華電子股份有限公司 UMC
 台灣康寧顯示玻璃股份有限公司 CORNING
 台灣神隆股份有限公司 ScinoPharm Taiwan
 群創光電股份有限公司 InnoLux



電線用鋼/鋁管 Rigid Steel/Aluminum Alloy Conduits

電線用鋼管 Rigid Steel Conduits / CNS 2606



型號 Cat.NO.	規格 Conduit Size		尺寸 Dimensions(mm)				重量 Weight Kg/m
	A	B	外徑 O.D.	厚度 Thickness	近似內徑 APPROX.I.D.	長度 Length	
R-2606-04P	16	1/2"	21.0	2.3	16.4	4000	1.06
R-2606-06P	22	3/4"	26.5	2.3	21.9	4000	1.37
R-2606-1P	28	1"	33.3	2.5	28.3	4000	1.90
R-2606-12P	36	1-1/4"	41.9	2.5	36.9	4000	2.43
R-2606-15P	42	1-1/2"	47.8	2.5	42.8	4000	2.79
R-2606-2P	54	2"	59.6	2.8	54.0	4000	3.92
R-2606-25P	70	2-1/2"	75.2	2.8	69.6	4000	5.00
R-2606-3P	82	3"	87.9	2.8	82.3	4000	5.88
R-2606-4P	104	4"	113.4	3.5	106.4	4000	9.48

* Tolerance: 1/2"~3"±3mm, 4"±4mm (公差: 1/2"~3"±3mm, 4"±4mm)

電線用鋼管 Rigid Steel Conduits / ANSI C80.1



型號 Cat.NO.	規格 Conduit Size		尺寸 Dimensions(mm)				重量 Weight Kg/m
	A	B	外徑 O.D.	厚度 Thickness	標稱內徑 I.D.	長度 Length	
R-C80.1-04N	16	1/2"	21.3	2.6	16.1	4000	1.22
R-C80.1-06N	22	3/4"	26.7	2.7	21.2	4000	1.61
R-C80.1-1N	28	1"	33.4	3.2	27.0	4000	2.38
R-C80.1-12N	36	1-1/4"	42.2	3.4	35.4	4000	3.24
R-C80.1-15N	42	1-1/2"	48.3	3.5	41.2	4000	3.88
R-C80.1-2N	54	2"	60.3	3.7	52.9	4000	5.18
R-C80.1-25N	70	2-1/2"	73.0	4.9	63.2	4000	8.23
R-C80.1-3N	82	3"	88.9	5.2	78.5	4000	10.75
R-C80.1-4N	104	4"	114.3	5.7	102.9	4000	15.32

* Tolerance: O.D. 1/2"~2"±0.38mm, 2-1/2"~4"±0.64mm
(公差: 外徑1/2"~2"±0.38mm, 2-1/2"~4"±0.64mm)

電線用鋁管 Rigid Aluminum Alloy Conduits



型號 Cat.NO.	規格 Conduit Size	尺寸 Dimensions(mm)				重量 Weight Kg/m
		外徑 O.D.	厚度 Thickness	內徑 I.D.	長度 Length	
R-ALPIPE-06P	3/4"	26.9	2.88	21.1	6000	0.55
R-ALPIPE-1P	1"	33.8	3.40	27.0	6000	0.82
R-ALPIPE-15P	1-1/2"	48.4	3.68	41.0	6000	1.31
R-ALPIPE-2P	2"	60.2	3.90	52.4	6000	1.62
R-ALPIPE-25P	2-1/2"	76.0	5.15	65.7	6000	2.87
R-ALPIPE-3P	3"	88.7	5.50	77.7	6000	3.84
R-ALPIPE-4P	4"	114.3	5.55	103.2	6000	5.34

* Tolerance: 1/2"~3"±3mm, 4"±4mm (公差: 1/2"~3"±3mm, 4"±4mm)

6R 90°/45°電管月彎 6R Normal Bends 90°/45°

正6R 90°/45°電管月彎 6R Special Large Bends 90°/45°

NB690 / NB645 / NBL690 / NBL645

1 用途

Applications

使用於電纜線的拉線上用。電線用導管以螺紋鎖入

To provide access to conductors for pulling. Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- ANSI C80.1 / C

鍍鋅鋼管C80.1 / C

- Stainless Steel 304 / S4

不鏽鋼SUS304 / S4

- CNS2606 / 2

鍍鋅鋼管CNS2606 / 2

- Stainless Steel 316 / S6

不鏽鋼SUS316 / S6

- Steel / Zinc Electroplated / E

鋼 / 電鍍鋅 / E

- ANSI C80.1 / PVC Coating / P

鍍鋅鋼管C80.1 / PVC包覆 / P

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P


- NPT(美牙) / N

4 如何訂購

How to Order

選擇NB690(45) 6R電管月彎螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-C, 2, E, S4, S6, P"。例如：R-NB690-4N-C、R-NB645-15P-2...

For optional thread standards of NB690(45), add the suffix "P,N" for thread to the end of Cat No., optional material of NB690(45), add the suffix "-C, 2, E, S4, S6, P" after the thread code. Ex: R-NB690-4N-C, R-NB645-15P-2...



產品型號 Cat.NO.		規格	尺寸 Dimensions (mm)	
Normal	Special Large	Conduit Size	Normal R	Special Large R
R-NB690(45)-04	R-NBL690(45)-04	1/2"	100	120
R-NB690(45)-06	R-NBL690(45)-06	3/4"	125	150
R-NB690(45)-1	R-NBL690(45)-1	1"	150	175
R-NB690(45)-12	R-NBL690(45)-12	1-1/4"	185	200
R-NB690(45)-15	R-NBL690(45)-15	1-1/2"	190	250
R-NB690(45)-2	R-NBL690(45)-2	2"	250	320
R-NB690(45)-25	R-NBL690(45)-25	2-1/2"	310	500
R-NB690(45)-3	R-NBL690(45)-3	3"	355	500
R-NB690(45)-4	R-NBL690(45)-4	4"	520	650
-	R-NBL690(45)-5	5"	-	850
-	R-NBL690(45)-6	6"	-	1000

* Tolerance: ±5% (公差: ±5%)

NB390 / NB345

外絲短管 Nipples

NIP

1 用途

Applications

連接電線用導管或電線用導管與電管配件連接用

To connect threaded rigid or RMC and IMC conduit to cast hubs.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

– Steel / Zinc Electroplated / E
鋼 / 電鍍鋅 / E

– Stainless Steel 304 / S4
不鏽鋼SUS304 / S4

– Steel / Hot Dip Galvanized / H
鋼 / 熱浸鍍鋅 / H

– Stainless Steel 316 / S6
不鏽鋼SUS316 / S6

– Aluminum Alloy / AL
鋁合金 / AL

3 螺紋 / 代碼

Thread Standards / Code

– BSPT(英牙) / P

– NPT(美牙) / N

4 長度 / 代碼

Length / Code

長度 Length	1寸	2寸	3寸	4寸	5寸	6寸	7寸	8寸	9寸	10寸
Code	1 L	2 L	3 L	4 L	5 L	6 L	7 L	8 L	9 L	10 L

5 如何訂購


How to Order

選擇立布螺紋後在產品編號後加上螺紋代碼"P,N"，選擇長度及材質後在螺紋後加上長度代碼"1L, 2L, 3L..."，在長度代碼後加上材質代碼"-E, H, AL..."。

例如：R-NIP-04P2L-E、R-NIP-3N3L-H...

For optional thread standards of NIP, add the suffix "P,N" for thread to the end of Cat No., optional length and material of NIP, add the suffix "1L, 2L, 3L..." for length after the thread code, add the suffix "-E, H, AL..." for material after the length code.

Ex: R-NIP-04P2L-E, R-NIP-3N3L-H...



產品型號		規格	R 寸 Dimensions
Cat.NO.	Hub Size	A	
R-NIP-04	1/2"	1~10寸	
R-NIP-06	3/4"	1~10寸	
R-NIP-1	1"	1~10寸	
R-NIP-12	1-1/4"	1~10寸	
R-NIP-15	1-1/2"	1~10寸	
R-NIP-2	2"	1~10寸	
R-NIP-25	2-1/2"	2~10寸	
R-NIP-3	3"	3~10寸	
R-NIP-4	4"	3~10寸	

• Tolerance: ±5% (公差: ±5%)

• NIPPLE 5" & 6" are optional. Please contact us.
(立布 5" & 6" 可供選擇，請與我們聯絡)

• NIPPLE length can be customized (立布長度可依客戶需求訂製)

1 用途

Applications

內絲管節用於電線用導管間連接

Couplings are used to connect two pieces of rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Steel / Zinc Electroplated / E
鋼 / 電鍍鋅 / E

- Aluminum Alloy / AL
鋁合金 / AL

- Steel / Hot Dip Galvanized / H
鋼 / 熱浸鍍鋅 / H

- Stainless Steel 304 / S4
不鏽鋼SUS304 / S4

- Steel / H.D.G&PVC Coating / P
鋼 / 熱浸鍍鋅PVC包覆 / P

- Stainless Steel 316 / S6
不鏽鋼SUS316 / S6

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P


- NPT(美牙) / N

4 如何訂購

How to Order

選擇內絲管節螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋後加上材質代碼"-E, H, P, AL, S4, S6..."。例如：R-CPL-04P-E、R-CPL-04P-H...

For optional thread standards of CPL, add the suffix "P,N" for thread to the end of Cat No., optional material of CPL, add the suffix "-E, H, P, AL, S4, S6..." for material after the thread code. Ex: R-CPL-04P-E, R-CPL-04P-H...



產品型號	規格	尺寸 Dimensions(mm)
Cat.NO.	Hub Size	A
R-CPL-04	1/2"	38
R-CPL-06	3/4"	42
R-CPL-1	1"	51
R-CPL-12	1-1/4"	52
R-CPL-15	1-1/2"	54
R-CPL-2	2"	55
R-CPL-25	2-1/2"	73
R-CPL-3	3"	76
R-CPL-4	4"	88

• Tolerance: ±5% (公差: ±5%)

• CPL 5" & 6" are optional. Please contact us.
(CPL 5" & 6" 可供選擇，請與我們聯絡)

C型穿線盒 C Type Conduit Outlet Boxes

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電纜用導管以螺紋鎖入
To provide access to conductors for pulling, dividing and maintenance.
Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | - Stainless Steel 304 / S4
不銹鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | - Stainless Steel 316 / S6
不銹鋼SUS316 / S6 |
| - Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | - Aluminum Alloy / AL
鋁合金 / AL |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P - NPT(美牙) / N

4 如何訂購

How to Order

選擇C型穿線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-C-04P-AL、R-C-3N-H...

For optional thread standards of C Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of C type Outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-C-04P-AL, R-C-3N-H...



產品型號		規格		尺寸 Dimensions (mm)		
Cat.NO.	Hub Size	A	B	C	D	
R-C-04	1/2"	135	38	86	36	
R-C-06	3/4"	160	44	103	41	
R-C-1	1"	174	48	116	46	
R-C-12	1-1/4"	201	63	128	61	
R-C-15	1-1/2"	217	65	142	66	
R-C-2	2"	236	81	159	81	
R-C-25	2-1/2"	333	110	225	108	
R-C-3	3"	409	129	285	137	
R-C-4	4"	481	153	360	171	

* Tolerance: ±5% (公差: ±5%)

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電線用導管以螺紋鎖入
To provide access to conductors for pulling, dividing and maintenance.
Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Gray Iron / Hot Dip Galvanized / H - Stainless Steel 304 / S4
灰口鑄鐵 / 熱浸鍍鋅 / H 不鏽鋼SUS304 / S4
- Ductile Iron / Hot Dip Galvanized / H2 - Stainless Steel 316 / S6
球墨鑄鐵 / 熱浸鍍鋅 / H2 不鏽鋼SUS316 / S6
- Ductile Iron / H.D.G&PVC Coating / P - Aluminum Alloy / AL
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P 鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P - NPT(美牙) / N

4 如何訂購

How to Order

選擇LB型穿線盒螺紋後在產品編號後加上螺紋代碼“P,N”，選擇材質後在螺紋編號後加上材質代碼“-H, H2, P, S4, S6, AL”。例如：R-LB-04P-AL、R-LB-3N-H...

For optional thread standards of LB Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of LB Type Outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-LB-04P-AL, R-LB-3N-H...



產品型號	規格	尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D
R-LB-04	1/2"	115	58	86	36
R-LB-06	3/4"	139	65	103	41
R-LB-1	1"	153	69	116	46
R-LB-12	1-1/4"	175	88	128	61
R-LB-15	1-1/2"	191	91	142	66
R-LB-2	2"	208	109	159	81
R-LB-25	2-1/2"	291	153	225	108
R-LB-3	3"	363	177	285	137
R-LB-4	4"	437	195	360	171

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電線用導管以螺紋鎖入。
To provide access to conductors for pulling, dividing and maintenance.
Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | - Stainless Steel 304 / S4
不鏽鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | - Stainless Steel 316 / S6
不鏽鋼SUS316 / S6 |
| - Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | - Aluminum Alloy / AL
鋁合金 / AL |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P - NPT(美牙) / N

4 如何訂購

How to Order

選擇LR型穿線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-LR-04P-AL、R-LR-3N-H...

For optional thread standards of LR Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of LR Type Outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-LR-04P-AL, R-LR-3N-H...



產品型號		規格	尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D	
R-LR-04	1/2"	115	38	86	56	
R-LR-06	3/4"	139	44	103	62	
R-LR-1	1"	153	48	116	67	
R-LR-12	1-1/4"	175	63	128	86	
R-LR-15	1-1/2"	191	65	142	92	
R-LR-2	2"	208	81	159	109	
R-LR-25	2-1/2"	291	110	225	146	
R-LR-3	3"	363	129	285	181	
R-LR-4	4"	437	153	360	213	

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電線用導管以螺紋鎖入。

To provide access to conductors for pulling, dividing and maintenance.

Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H

- Stainless Steel 304 / S4
不銹鋼SUS304 / S4

- Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2

- Stainless Steel 316 / S6
不銹鋼SUS316 / S6

- Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P

- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P


- NPT(美牙) / N

4 如何訂購

How to Order

選擇LL型穿線盒螺紋後在產品編號後加上螺紋代碼“P,N”，選擇材質後在螺紋編號後加上材質代碼“-H, H2, P, S4, S6, AL”。例如：R-LL-04P-AL、R-LL-3N-H...

For optional thread standards of LL Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of LL Type Outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-LL-04P-AL, R-LL-3N-H...



產品型號		規格	尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D	
R-LL-04	1/2"	115	38	86	56	
R-LL-06	3/4"	139	44	103	62	
R-LL-1	1"	153	48	116	67	
R-LL-12	1-1/4"	175	63	128	86	
R-LL-15	1-1/2"	191	65	142	92	
R-LL-2	2"	208	81	159	109	
R-LL-25	2-1/2"	291	110	225	146	
R-LL-3	3"	363	129	285	181	
R-LL-4	4"	437	153	360	213	

* Tolerance: ±5% (公差: ±5%)

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電線用導管以螺紋鎖入。
To provide access to conductors for pulling, dividing and maintenance.
Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H
- Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2
- Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P
- Stainless Steel 304 / S4
不鏽鋼SUS304 / S4
- Stainless Steel 316 / S6
不鏽鋼SUS316 / S6
- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P
- NPT(美牙) / N

4 如何訂購

How to Order

選擇T型穿線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-T-04P-AL、R-T-3N-H...

For optional thread standards of T Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of T Type outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-T-04P-AL, R-T-3N-H...



產品型號	規格	尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D
R-T-04	1/2"	135	38	86	56
R-T-06	3/4"	160	44	103	62
R-T-1	1"	174	48	116	67
R-T-12	1-1/4"	201	63	128	86
R-T-15	1-1/2"	217	65	142	92
R-T-2	2"	236	81	159	109
R-T-25	2-1/2"	333	110	225	146
R-T-3	3"	409	129	285	181
R-T-4	4"	480	153	360	213

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電線用導管以螺紋鎖入。
To provide access to conductors for pulling, dividing and maintenance.
Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H
- Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2
- Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P
- Stainless Steel 304 / S4
不銹鋼SUS304 / S4
- Stainless Steel 316 / S6
不銹鋼SUS316 / S6
- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P
- NPT(美牙) / N

4 如何訂購

How to Order

選擇TB型穿線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-TB-04P-AL、R-TB-3N-H...

For optional thread standards of TB Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of TB Type outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-TB-04P-AL, R-TB-3N-H...



產品型號		規格				尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D				
R-TB-04	1/2"	135	58	86	36				
R-TB-06	3/4"	160	65	103	41				
R-TB-1	1"	174	69	116	46				
R-TB-12	1-1/4"	201	88	128	61				
R-TB-15	1-1/2"	217	91	142	66				
R-TB-2	2"	236	109	159	81				
R-TB-25	2-1/2"	333	153	225	108				
R-TB-3	3"	409	177	285	137				
R-TB-4	4"	480	195	360	171				

• Tolerance: ±5% (公差: ±5%)

X型穿線盒 X Type Conduit Outlet Boxes

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電線用導管以螺紋鑽入。
To provide access to conductors for pulling, dividing and maintenance.
Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H
- Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2
- Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P
- Stainless Steel 304 / S4
不銹鋼SUS304 / S4
- Stainless Steel 316 / S6
不銹鋼SUS316 / S6
- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P
- NPT(美牙) / N

4 如何訂購

How to Order

選擇X型穿線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-X-04P-AL、R-X-06P-H...

For optional thread standards of X Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of X Type outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code.Ex: R-X-04P-AL, R-X-06P-H...



產品型號	規格	尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D
R-X-04	1/2"	135	38	86	76
R-X-06	3/4"	160	44	103	83
R-X-1	1"	174	48	116	88
R-X-12	1-1/4"	201	63	128	112
R-X-15	1-1/2"	217	65	142	118
R-X-2	2"	236	81	159	137

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

使用於電纜線的拉線、分線、維修上用。電線用導管以螺紋鎖入

To provide access to conductors for pulling, dividing and maintenance.

Threaded for rigid conduit RMC and IMC.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H

Stainless Steel 304 / S4
不銹鋼SUS304 / S4

Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2

Stainless Steel 316 / S6
不銹鋼SUS316 / S6

Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P

Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

BSPT(英牙) / P


NPT(美牙) / N

4 如何訂購

How to Order

選擇LBD型穿線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-LBD-04P-AL、R-LBD-06P-H...

For optional thread standards of LBD Type Outlet Box, add the suffix "P,N" for thread to the end of Cat No., optional material of LBD Type outlet Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-LBD-04P-AL, R-LBD-3N-H...



產品型號	規格	尺寸 Dimensions (mm)		
Cat.NO.	Hub Size	A	B	C
R-LBD-06	3/4"	151	68	40
R-LBD-1	1"	159	76	47
R-LBD-15	1-1/2"	315	128	118
R-LBD-2	2"	315	128	118
R-LBD-25	2-1/2"	490	210	150
R-LBD-3	3"	490	210	150
R-LBD-4	4"	723	251	180

* Tolerance: ±5% (公差: ±5%)

F*型方型開關盒

FB/FBB/FC/FL/FR/FCT/FX

1 用途

Applications

容納接線裝置並提供電纜線之分線與拉線

提供電纜線後續保修與因應系統變動之電纜重新接合

Accommodates wiring devices and provides opening to splice, tap or pull conductors.

Provide access to conductors for maintenance and future system changes.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

– Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H

– Stainless Steel 304 / S4
不鏽鋼SUS304 / S4

– Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2

– Stainless Steel 316 / S6
不鏽鋼SUS316 / S6

– Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P

– Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

– BSPT(英牙) / P

– NPT(美牙) / N

4 如何訂購

How to Order

選擇F*方型開關盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上

材質代碼"-H, H2, P, S4, S6, AL"。例如：R-F*-04P-AL、R-F*-06P-H...


可選類型"*"為"C", "B", "BB", "L", "R", "CT", "X"

For optional thread standards of F* Type Box, add the suffix "P,N" for thread to the end of Cat No., optional material of F* Type Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-F*-04P-AL, R-F*-06P-H...


Optional type "*" are "C", "B", "BB", "L", "R", "CT", "X"

F* Type Single Gang Cast Device Boxes


FB/FBB/FC/FL/FR/FCT/FX




| FB |




| FBB |




| FL |




| FR |




| FC |



| FCT |



| FX |



產品型號	規格	尺寸 Dimensions (mm)		
Cat.NO.	Hub Size	A	B	C
R-F*-04P	1/2"	120	70	48
R-F*-06P	3/4"	120	70	48
R-F*-1P	1"	120	70	48

• Tolerance: $\pm 5\%$ (公差: $\pm 5\%$)

G*型防爆圓形接線盒

GA/GC/GL/GT/GX

1 用途

Applications

安裝G*系列圓型接線盒在危險的電線導管系統內地區：

- 容納接線裝置並提供電纜線之分線與拉線
- 提供電纜線後續修與因應系統變動之電纜重新接合

G* series Round Outlet Boxes are installed in conduit systems within hazardous areas to:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.
- Provide access to conductors for maintenance and future system changes.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | - Stainless Steel 304 / S4
不銹鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | - Stainless Steel 316 / S6
不銹鋼SUS316 / S6 |
| - Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | - Aluminum Alloy / AL
鋁合金 / AL |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P - NPT(美牙) / N

4 如何訂購


How to Order

選擇G*圓型防爆型接線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-G*-04P-AL、R-G*-06P-H...

可選類型**為"A"、"C"、"L"、"T"、"X"

For optional thread standards of G* Type Box, add the suffix "P,N" for thread to the end of Cat No., optional material of G* Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-G*-04P-AL, R-G*-06P-H.

Optional type "*" are "A", "C", "L", "T", "X"




| GA |

產品型號	規格	尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D
R-G*-04P	1/2"	95	87	60	32
R-G*-06P	3/4"	95	87	60	38
R-G*-1P	1"	95	87	60	44
R-G*-12P	1-1/4"	114	102	70	56
R-G*-15P	1-1/2"	145	132	95	64
R-G*-2P	2"	145	132	105	76


· Tolerance: ±5% (公差: ±5%)

G* Type Explosionproof Conduit Round Outlet Boxes


GA/GC/GL/GT/GX




| GC |



| GL |



| GT |



| GX |

PG*型防水圓型接線盒

PGA/PGC/PGL/PGT/PGX

1 用途

Applications

- 容納接線裝置並提供電纜線之分線與拉線
- 提供電纜線後續修與因應系統變動之電纜重新接合
- 防水防塵功能
- Accommodates wiring devices and provides opening to splice, tap or pull conductors.
- Provide access to conductors for maintenance and future system changes.
- Waterproof & Dustproof

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | - Stainless Steel 304 / S4
不銹鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | - Stainless Steel 316 / S6
不銹鋼SUS316 / S6 |
| - Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | - Aluminum Alloy / AL
鋁合金 / AL |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

- | | |
|----------------|---------------|
| - BSPT(英牙) / P | - NPT(美牙) / N |
|----------------|---------------|

4 如何訂購

How to Order


選擇PG*防水圓型接線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-PGT-06P-H...
可選類型"*"為"A"、"C"、"L"、"T"、"X"

For optional thread standards of PG* Type Box, add the suffix "P,N" for thread to the end of Cat.No., optional material of PG* Box, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-PGT-06P-H...


Optional type "*" are "A", "C", "L", "T", "X"

PG* Type Waterproof Conduit Round Outlet Boxes


PGA/PGC/PGL/PGT/PGX




| PGA |




| PGC |



| PGL |



| PGT |



| PGX |

產品型號	規格	尺寸 Dimensions (mm)			
Cat.NO.	Hub Size	A	B	C	D
R-PG*-04P	1/2"	91	80	43	29
R-PG*-06P	3/4"	91	80	43	34
R-PG*-1P	1"	103	91	50	40

• Tolerance: $\pm 5\%$ (公差: $\pm 5\%$)

1 用途

Applications

使用於電纜線的拉線、分線、維修上用，螺紋出口圓蓋可旋入並固定照明燈具桿
To provide access to conductors for pulling, dividing and maintenance.
Hub cover include set screws for locking to lighting fixture stems.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | - Stainless Steel 304 / S4
不銹鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | - Stainless Steel 316 / S6
不銹鋼SUS316 / S6 |
| - Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | - Aluminum Alloy / AL
鋁合金 / AL |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P - NPT(美牙) / N

4 如何訂購

How to Order

選擇GS氣密燈接線盒螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-GS-06P-H...

For optional thread standards of GS, add the suffix "P,N" for thread to the end of Cat.No., optional material of GS, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-GS-06P-H...



產品型號	規格	尺寸 Dimensions (mm)		
Cat.NO.	Hub Size	A	B	C
R-GS-04	1/2"	83	125	88
R-GS-06	3/4"	83	125	88

* Tolerance: $\pm 5\%$ (公差: $\pm 5\%$)

1 用途

Applications

- 當安裝在外殼頂部時，這些配件充當呼吸器，允許空氣流過外殼，安裝於底部可使冷凝水連續排出外殼
- 可搭配EYD/EYDM安裝使用
- When installed in the top of an enclosure, these fittings act as breathers which allows air flow through the enclosure. Bottom installations permit water from condensation to drain from the enclosure continuously.
- Can be installed with EYD/EYDM.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

– Stainless Steel 304 / S4
不鏽鋼SUS304 / S4

– Stainless Steel 316 / S6
不鏽鋼SUS316 / S6

備註

Note

SUS304為標準品，SUS316材質可接單生產
Standard Material: SUS304
SUS316 material can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


– BSPT(英牙) / P

– NPT(美牙) / N

4 如何訂購

How to Order

選擇ECD排放栓螺紋後在產品編號後加上螺紋代碼“P,N”，選擇材質後在螺紋編號後加上材質代碼“-S4, S6”。例如：R-ECD-06N-S4、R-ECD-04N-S6
For optional thread standards of ECD, add the suffix "P,N" for thread to the end of Cat.No., optional material of ECD, add the suffix "-S4, S6" after the thread code. Ex: R-ECD-06N-S4, R-ECD-04N-S6



產品型號		規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	A	B	
R-ECD-04	1/2"	32	21	
R-ECD-06	3/4"	36	30	

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

危險場所中使用密封接頭的目的是最大限度地減少氣體和蒸汽的通過，並防止火焰從一個電氣裝置經過導管系統進入另一個電氣裝置

The purpose of seals in a hazardous location is to minimize the passage of gases and vapors and prevent the passage of flames from one electrical installation to another through the conduit system.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H
- Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2
- Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P
- Stainless Steel 304 / S4
不銹鋼SUS304 / S4
- Stainless Steel 316 / S6
不銹鋼SUS316 / S6
- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

密封接頭EYM和EYDM型提供可拆卸的立布短管

EYM & EYDM style supplied with removeable close nipples.

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P
- NPT(美牙) / N

4 如何訂購

How to Order

選擇EY/EYD密封接頭螺紋後在產品編號後加上螺紋代碼“P,N”，選擇材質後在螺紋編號後加上材質代碼“-H, H2, P, S4, S6, AL”。例如：R-EY(EYD)-06P-H、R-EY(EYD)-3N-S4...

For optional thread standards of EY/EYD, add the suffix "P,N" for thread to the end of Cat.No., optional material of EY/EYD, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-EY(EYD)-06P-H, R-EY(EYD)-3N-S4...



產品型號		規格	尺寸 Dimensions (mm)		
Cat.NO.	Hub Size	A	B	C	
R-EY(EYM)-04 / R-EYD(EYDM)-04	1/2"	86	32	42	
R-EY(EYM)-06 / R-EYD(EYDM)-06	3/4"	97	40	56	
R-EY(EYM)-1 / R-EYD(EYDM)-1	1"	112	45	65	
R-EY(EYM)-12 / R-EYD(EYDM)-12	1-1/4"	133	55	39	
R-EY(EYM)-15 / R-EYD(EYDM)-15	1-1/2"	143	60	55	
R-EY(EYM)-2 / R-EYD(EYDM)-2	2"	166	73	65	
R-EY(EYM)-25 / R-EYD(EYDM)-25	2-1/2"	191	89	75	
R-EY(EYM)-3 / R-EYD(EYDM)-3	3"	214	107	82	
R-EY(EYM)-4 / R-EYD(EYDM)-4	4"	252	135	91	

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

- UNY/UNF用於連接兩端導管或將導管連接到接線盒，電管配件或設備端
- 允許在不轉動或拆除導管的情況下拆除設備
- UNY/UNF unions are used to connect two pieces of conduit or attach conduit to junction boxes, fittings or devices.
- Permits removal of equipment without turning or removal of conduit.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | - Stainless Steel 304 / S4
不銹鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | - Stainless Steel 316 / S6
不銹鋼SUS316 / S6 |
| - Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | - Aluminum Alloy / AL
鋁合金 / AL |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- | | |
|----------------|---------------|
| - BSPT(英牙) / P | - NPT(美牙) / N |
|----------------|---------------|

4 如何訂購


How to Order

選擇UNY/UNF由任接頭螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, H2, P, S4, S6, AL"。例如：R-UNY(UNF)-06P-H2、R-UNY(UNF)-3N-S4...

For optional thread standards of UNY/UNF, add the suffix "P,N" for thread to the end of Cat.No., optional material of UNY/UNF, add the suffix "-H, H2, P, S4, S6, AL" after the thread code. Ex: R-UNY(UNF)-06P-H2, R-UNY(UNF)-3N-S4...



UNY



UNF

產品型號	規格	尺寸 Dimensions (mm)		
Cat.NO.	Hub Size	A	B	C
R-UNY-04 / R-UNF-04	1/2"	39	53	40
R-UNY-06 / R-UNF-06	3/4"	46	61	48
R-UNY-1 / R-UNF-1	1"	51	71	52
R-UNY-12 / R-UNF-12	1-1/4"	67	65	47
R-UNY-15 / R-UNF-15	1-1/2"	74	69	53
R-UNY-2 / R-UNF-2	2"	87	85	61
R-UNY-25 / R-UNF-25	2-1/2"	106	95	70
R-UNY-3 / R-UNF-3	3"	123	97	70
R-UNY-4 / R-UNF-4	4"	146	110	78

• Tolerance: ±5% (公差: ±5%)

• UNY 5" is optional. Please contact us. (UNY 5"可供選擇，請與我們聯絡)

HUB接線箱接頭 HUB Conduit Hubs

1 用途

Applications

接線箱接頭提供電線導管通過金屬外殼時達到防水防塵的效用。HUB安裝時，需切割適合進入孔尺寸

Conduit hubs provide a liquid tight and dust tight termination of electrical conduit through the walls of sheet metal enclosures. The hubs fit into standard knock-out dimensions.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | - Stainless Steel 304 / S4
不銹鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | - Stainless Steel 316 / S6
不銹鋼SUS316 / S6 |
| - Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | - Aluminum Alloy / AL
鋁合金 / AL |
| - Brass Cast/ B
鑄黃銅 / B | |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P - NPT(美牙) / N

4 如何訂購

How to Order

選擇HUB接線箱接頭螺紋後在產品編號後加上螺紋代碼“P,N”，選擇材質後在螺紋編號後加上材質代碼“-H, H2, P, S4, S6, AL, B”。例如：R-HUB-06P-H2、R-HUB-3N-S4...

For optional thread standards of HUB, add the suffix“P,N” for thread to the end of Cat No., optional material of HUB, add the suffix“-H, H2, P, S4, S6, AL, B” after the thread code. Ex: R-HUB-06P-H2, R-HUB-3N-S4...



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	A	B
R-HUB-04	1/2"	37	35
R-HUB-06	3/4"	43	38
R-HUB-1	1"	48	44
R-HUB-12	1-1/4"	61	44
R-HUB-15	1-1/2"	68	47
R-HUB-2	2"	79	47
R-HUB-25	2-1/2"	94	56
R-HUB-3	3"	116	65
R-HUB-4	4"	140	80

• Tolerance: $\pm 5\%$ (公差: $\pm 5\%$)

• HUB 5" is optional. Please contact us.
(HUB 5"可供選擇，請與我們聯絡)

1 用途

Applications

用於固定進入箱殼的導管集線器或類似產品

Used to secure conduit hubs or similar products entering an enclosure.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|---|----------------------------|
| - Steel / Hot Dip Galvanized / H | - Stainless Steel 304 / S4 |
| 鋼 / 熱浸鍍鋅 / H | 不鏽鋼SUS304 / S4 |
| - Ductile Iron / Hot Dip Galvanized / H | - Stainless Steel 316 / S6 |
| 球墨鑄鐵 / 熱浸鍍鋅 / H | 不鏽鋼SUS316 / S6 |

備註

Note

熱浸鍍鋅鋼1/2"~2"和熱浸鍍鋅鑄件2-1/2"~4"為標準品

其他材質/表面處理可接單生產

Standard Material: LN size 1/2" to 2"---Steel, 2-1/2" to 4"---Ductile Iron

Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- | | |
|----------------|---------------|
| - BSPT(英牙) / P | - NPT(美牙) / N |
|----------------|---------------|

4 如何訂購

How to Order

選擇LN鎖緊螺帽螺紋後在產品編號加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-H, S4, S6"。例如：R-LN-06P-H、R-LN-3N-S4...

For optional thread standards of LN, add the suffix"P,N" for thread to the end of Cat No., optional material of LN, add the suffix"-H,S4,S6" after the thread code. Ex: R-LN-06P-H, R-LN-3N-S4...



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	A	B
R-LN-04	1/2"	28	3
R-LN-06	3/4"	34	3
R-LN-1	1"	43	4
R-LN-12	1-1/4"	54	4
R-LN-15	1-1/2"	61	4
R-LN-2	2"	75	4
R-LN-25	2-1/2"	96	5
R-LN-3	3"	110	10
R-LN-4	4"	140	11

• Tolerance: ±5% (公差: ±5%)

• LN 5" is optional. Please contact us.
(LN 5"可供選擇，請與我們聯絡)

1 用途

Applications

- 防止拉線時電纜導體受到損壞 Prevent damage to conductors when pulling.
- BUIS型絕緣護線套是附有接地螺絲 BUIS Type is attached with grounding screw.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| Gray Iron / Zinc Electroplated / E
灰口鑄鐵 / 電鍍鋅 / E | Stainless Steel 304 / S4
不鏽鋼SUS304 / S4 |
| Gray Iron / Hot Dip Galvanized / H
灰口鑄鐵 / 熱浸鍍鋅 / H | Stainless Steel 316 / S6
不鏽鋼SUS316 / S6 |
| Ductile Iron / Hot Dip Galvanized / H2
球墨鑄鐵 / 熱浸鍍鋅 / H2 | Aluminum Alloy / AL
鋁合金 / AL |
| Ductile Iron / H.D.G&PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Gray Iron & Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code


- BSPT(英牙) / P NPT(美牙) / N

4 如何訂購

How to Order

選擇BUI(BUIS)絕緣護線套螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-E, H, H2, P, S4, S6, AL"。例如：R-BUI(BUIS)-06P-H2、R-BUI(BUIS)-3N-S4...


For optional thread standards of BUI(BUIS), add the suffix "P,N" for thread to the end of Cat No., optional material of BUI(BUIS), add the suffix "-E, H, H2, P, S4, S6, AL" after the thread code. Ex: R-BUI(BUIS)-06P-H2, R-BUI(BUIS)-3N-S4...



產品型號	規格	尺寸 Dimensions (mm)		
Cat.NO.	Hub Size	A	B	C
R-BUI(BUIS)-04	1/2"	28	15	13
R-BUI(BUIS)-06	3/4"	33	19	14
R-BUI(BUIS)-1	1"	41	27	17
R-BUI(BUIS)-12	1-1/4"	51	34	18
R-BUI(BUIS)-15	1-1/2"	58	40	18
R-BUI(BUIS)-2	2"	72	47	23
R-BUI(BUIS)-25	2-1/2"	85	57	24
R-BUI(BUIS)-3	3"	109	70	27
R-BUI(BUIS)-4	4"	137	95	32

- Tolerance: ±5% (公差: ±5%)
- BUI/BUIS 5"* is optional. Please contact us.
(BUI/BUIS 5"可供選擇，請與我們聯絡)

RE型內外牙縮小接頭 RE Type Reducers



產品型號	規格 Hub Size		尺寸 Dimensions (mm)	
Cat.NO.	Male	Female	A	B
R-RE-06*04*	3/4"	1/2"	20	26.5
R-RE-1*04*	1"	1/2"	20	33
R-RE-1*06*		3/4"	20	33
R-RE-12*04*		1/2"	25	42
R-RE-12*06*	1-1/4"	3/4"	25	42
R-RE-12*1*		1"	25	42
R-RE-15*04*	1-1/2"	1/2"	25	48
R-RE-15*06*		3/4"	25	48
R-RE-15*1*		1"	25	48
R-RE-15*12*	2"	1-1/4"	25	48
R-RE-2*04*		1/2"	25	60
R-RE-2*06*		3/4"	25	60
R-RE-2*1*	2-1/2"	1"	25	60
R-RE-2*12*		1-1/4"	25	60
R-RE-2*15*		1-1/2"	25	60
R-RE-25*04*	3"	1/2"	34	72
R-RE-25*06*		3/4"	34	72
R-RE-25*1*		1"	34	72
R-RE-25*12*	3-1/2"	1-1/4"	34	72
R-RE-25*15*		1-1/2"	34	72
R-RE-25*2*		2"	34	72
R-RE-3*04*	4"	1/2"	34	88
R-RE-3*06*		3/4"	34	88
R-RE-3*1*		1"	34	88
R-RE-3*12*	4-1/2"	1-1/4"	34	88
R-RE-3*15*		1-1/2"	34	88
R-RE-3*2*		2"	34	88
R-RE-3*25*	5"	2-1/2"	34	88
R-RE-4*04*		1/2"	38	113
R-RE-4*06*		3/4"	38	113
R-RE-4*1*	5-1/2"	1"	38	113
R-RE-4*12*		1-1/4"	38	113
R-RE-4*15*		1-1/2"	38	113
R-RE-4*2*	6"	2"	38	113
R-RE-4*25*		2-1/2"	38	113
R-RE-4*3*	6-1/2"	3"	38	113

* Tolerance: $\pm 5\%$ (公差: $\pm 5\%$)

* Metric Fine Thread and PG Thread are optional. Please contact us.
(公制牙與PG牙可供選擇, 請與我們聯絡)

1 用途

Applications

縮小配管螺紋尺寸轉接用

To reduce the trade size of a tapped hole or hub

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Steel / Zinc Electroplated / E
鋼 / 電鍍鋅 / E

- Stainless Steel 304/ S4
不鏽鋼SUS304 / S4

- Stainless Steel 316/ S6
不鏽鋼SUS316 / S6

- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

電鍍鋅鋼為標準品, 其他材質 / 表面處理可
接單生產

Standard Material: Steel

Standard Finish: Zinc Electroplated

Other Material/Finish can be produced
by order

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P - NPT(美牙) / N

4 如何訂購

How to Order


選擇RE內外牙縮小接頭螺紋後在產品編號後加上
螺紋代碼"P,N", 選擇材質後在螺紋編號後加上材
質代碼"-E, S4, S6, AL"。

例如: R-RE-25N06P-E、R-RE-06P04P-S4...

For optional thread standards of RE, add the
suffix "P,N" for thread to the end of Cat No.,
optional material of RE, add the suffix "-E, S4,
S6, AL" after the thread code.

Ex: R-RE-25N06P-E, R-RE-06P04P-S4...

ME型內外絲放大接頭 ME Type Enlargers and Adapters



產品型號	規格 Hub Size		尺寸 Dimensions (mm)	
Cat.NO.	Female	Male	A	B
R-ME-06*04*	3/4"	1/2"	45	39
R-ME-1*04*	1"	1/2"	50	47
R-ME-1*06*		3/4"	50	47
R-ME-12*04*	1-1/4"	1/2"	48	49
R-ME-12*06*		3/4"	48	49
R-ME-12*1*	1-1/2"	1"	52	49
R-ME-15*04*		1/2"	48	55
R-ME-15*06*	2"	3/4"	48	55
R-ME-15*1*		1"	52	55
R-ME-15*12*	2-1/2"	1-1/4"	53	55
R-ME-2*04*		1/2"	52	70
R-ME-2*06*	3"	3/4"	52	70
R-ME-2*1*		1"	56	70
R-ME-2*12*	3-1/2"	1-1/4"	57	70
R-ME-2*15*		1-1/2"	58	70
R-ME-25*04*	4"	1/2"	65	95
R-ME-25*06*		3/4"	65	95
R-ME-25*1*	4-1/2"	1"	65	95
R-ME-25*12*		1-1/4"	65	95
R-ME-25*15*	5"	1-1/2"	65	95
R-ME-25*2*		2"	65	95
R-ME-3*04*	5-1/2"	1/2"	75	115
R-ME-3*06*		3/4"	75	115
R-ME-3*1*	6"	1"	75	115
R-ME-3*12*		1-1/4"	75	115
R-ME-3*15*	6-1/2"	1-1/2"	75	115
R-ME-3*2*		2"	75	115
R-ME-3*25*	7"	2-1/2"	75	115
R-ME-4*04*		1/2"	85	140
R-ME-4*06*	7-1/2"	3/4"	85	140
R-ME-4*1*		1"	85	140
R-ME-4*12*	8"	1-1/4"	85	140
R-ME-4*15*		1-1/2"	85	140
R-ME-4*2*	8-1/2"	2"	85	140
R-ME-4*25*		2-1/2"	85	140
R-ME-4*3*	9"	3"	85	140

1 用途

Applications

放大配管螺紋尺寸轉接用
To enlarge the trade size of a tapped hole or hub

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Steel / Zinc Electroplated / E
鋼 / 電鍍鋅 / E
- Ductile Iron / Hot Dip Galvanized / H
球墨鑄鐵 / 熱浸鋅 / H
- Stainless Steel 304 / S4
不鏽鋼SUS304 / S4
- Stainless Steel 316 / S6
不鏽鋼SUS316 / S6
- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

熱浸鋅鍍件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Ductile Iron
Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P
- NPT(美牙) / N

4 如何訂購

How to Order

選擇ME內外絲放大接頭螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-E, H, S4, S6, AL"。

例如：R-ME-25N06P-H、R-ME-06P04P-S4...

For optional thread standards of ME, add the suffix "P,N" for thread to the end of Cat No., optional material of ME, add the suffix "-E, H, S4, S6, AL" after the thread code.

Ex: R-ME-25N06P-H, R-ME-06P04P-S4...

* Tolerance: ±5% (公差: ±5%)

* Metric Fine Thread and PG Thread are optional. Please contact us.
(公制牙與PG牙可供選擇，請與我們聯絡)

RA型直角管卡 / PAR型平行管卡 / EG型沿邊管卡

RA Type Right Angle Clamps / PAR Type Parallel Clamps / EG Type Edge Clamps

1 用途

Applications

設計用於固定電線導管RMC和IMC或EMT，平行或垂直於通道，鋼樑和角度支撐
Designed to secure rigid metal conduit, RMC and IMC or EMT across, parallel or perpendicular to channel, beam and angle supports.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Ductile Iron / Zinc Electroplated / E 球墨鑄鐵 / 電鍍鋅 / E
- Ductile Iron / Hot Dip Galvanized / H 球墨鑄鐵 / 熱浸鍍鋅 / H
- Ductile Iron / H.D.G & PVC Coating / P 球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P
- Stainless Steel 304 / S4 不銹鋼SUS304 / S4
- Stainless Steel 316 / S6 不銹鋼SUS316 / S6

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產
Standard Material: Ductile Iron / Standard Finish: Hot Dip Galvanized
Other Material/Finish can be produced by order


4 如何訂購

How to Order

選擇管卡樣式材質後在產品編號後加上材質代碼"-E, H..."。


例如：R-RA/PAR/EG-04-E、R-RA/PAR/EG-06-H...

For optional material of RA/PAR/EG, add the suffix "-E, H..." to the end of Cat No. Ex: R-RA/PAR/EG-04-E, R-RA/PAR/EG-06-H...



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	A	B
R-RA-04	1/2"	40	29
R-RA-06	3/4"	40	34
R-RA-1	1"	42	42
R-RA-12	1-1/4"	44	52
R-RA-15	1-1/2"	46	56
R-RA-2	2"	51	71
R-RA-25	2-1/2"	51	85
R-RA-3	3"	53	97
R-RA-4	4"	53	124
R-RA-5	5"	57	154

* Tolerance: ±5% (公差: ±5%)



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	A	B
R-PAR-04	1/2"	71	71
R-PAR-06	3/4"	71	76
R-PAR-1	1"	71	81
R-PAR-12	1-1/4"	71	84
R-PAR-15	1-1/2"	71	108
R-PAR-2	2"	71	122

* Tolerance: ±5% (公差: ±5%)



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	A	B
R-EG-04	1/2"	54	67
R-EG-06	3/4"	62	76
R-EG-1	1"	69	81
R-EG-12	1-1/4"	82	103
R-EG-15	1-1/2"	84	113
R-EG-2	2"	100	127

* Tolerance: ±5% (公差: ±5%)

1 用途

Applications

設計用於固定電線導管RMC和IMC於通道上做支撐

Designed to secure rigid metal conduit RMC and IMC to channel supports.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| – Ductile Iron / Zinc Electroplated / E
球墨鑄鐵 / 電鍍鋅 / E | – Stainless Steel 304 / S4
不銹鋼SUS304 / S4 |
| – Ductile Iron / Hot Dip Galvanized / H
球墨鑄鐵 / 熱浸鍍鋅 / H | – Stainless Steel 316 / S6
不銹鋼SUS316 / S6 |
| – Ductile Iron / H.D.G & PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P | |

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Ductile Iron

Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order


3 如何訂購

How to Order

選擇ORA型單孔管卡材質後在產品編號後加上材質代碼“-E, H, P, S4, S6”。

例如：R-ORA-04-E、R-ORA-06-H...

For optional material of ORA, add the suffix“-E, H, P, S4, S6” to the end of Cat No. Ex: R-ORA-04-E, R-ORA-06-H...



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	A	B
R-ORA-04	1/2"	23	8.5
R-ORA-06	3/4"	26	10
R-ORA-1	1"	32	10
R-ORA-12	1-1/4"	36	10
R-ORA-15	1-1/2"	45	13
R-ORA-2	2"	56	15
R-ORA-25	2-1/2"	65	16
R-ORA-3	3"	74	18
R-ORA-4	4"	85	20

* Tolerance: $\pm 5\%$ (公差: $\pm 5\%$)

1 用途

Applications

改變剛性RMC和IMC導管系統的方向

To change direction in rigid or RMC and IMC conduit systems.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Ductile Iron / Zinc Electroplated / E
球墨鑄鐵 / 電鍍鋅 / E
- Ductile Iron / Hot Dip Galvanized / H
球墨鑄鐵 / 熱浸鍍鋅 / H
- Ductile Iron / H.D.G & PVC Coating / P
球墨鑄鐵 / 熱浸鍍鋅PVC包覆 / P

- Stainless Steel 304 / S4
不鏽鋼SUS304 / S4
- Stainless Steel 316 / S6
不鏽鋼SUS316 / S6
- Aluminum Alloy / AL
鋁 / AL

備註

Note

熱浸鍍鋅鑄件為標準品，其他材質 / 表面處理可接單生產

Standard Material: Ductile Iron

Standard Finish: Hot Dip Galvanized

Other Material/Finish can be produced by order


3 如何訂購

How to Order

選擇90度內外絲彎頭材質後在產品編號後加上材質代碼"-E, H, P, S4, S6, AL"。

例如：R-SNB-04P-E、R-SNB-06P-H...

For optional material of SNB, add the suffix "-E, H, P, S4, S6, AL" to the end of Cat No. Ex: R-SNB-04P-E, R-SNB-06P-H...



產品型號	規格	尺寸 Dimensions (mm)
Cat.NO.	Hub Size	A
R-SNB-06P04P	3/4"1/2"	45
R-SNB-04P	1/2"	40
R-SNB-6P	3/4"	45
R-SNB-1P	1"	55

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

用於需要連接常產生位移或振動的危險區域，或者在管道系統中需要彎曲的危險區域
For use in hazardous areas where movement or vibration requires a flexible connection or a difficult bend is required in a conduit system.

2 材質

Material

標準品軟管內層為不銹鋼波紋管，外層為不銹鋼編織網

Standard Material:

- Inner layer: Stainless Steel corrugated tube
- Outer layer: Braided Stainless Steel wire

末端連接標準品為鑄鐵雙頭外絲由任，外絲由任+內絲由任，雙頭內絲由任

Standard Fitting End / Material:

- Union Male to Male(UNY to UNY) / Ductile iron
- Union Male to Female(UNY to UNF) / Ductile iron
- Union Female to Female(UNF to UNF) / Ductile iron

特殊長度及任何型式連接頭皆是可使用的，可接單生產

Special lengths and any type connector can be produced by order

3 如何訂購

How to Order

選擇軟管長度後在產品編號後加上材質代碼“-?L"。

例如：R-SEF-04-300L、R-SEF-06-500L...

For an optional length of SEF, add the suffix "-?L" to the end of Cat No.

Ex: R-SEF-04-300L, R-SEF-06-500L...



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Conduit Size	A	B
R-SEF-04	1/2"	23	長度依客戶需求製作
R-SEF-06	3/4"	27	
R-SEF-1	1"	34.5	
R-SEF-12	1-1/4"	42	
R-SEF-15	1-1/2"	53	
R-SEF-2	2"	63	
R-SEF-25	2-1/2"	80	
R-SEF-3	3"	98	
R-SEF-4	4"	111	

• Tolerance: ±5% (公差: ±5%)

I-EXAP 防爆粉
Sealing Compound



產品型號	規格	廠牌
Cat.NO.	Size	Maker
I-EXAP-5LB-KL	5LB	Killark
I-EXAP-5LB-CH	5LB	Crouse-Hinds
I-EXAP-5LB-AP	5LB	Appleton

I-EXTB 導電膏
Conductive Anti-corrosion



產品型號	規格	廠牌
Cat.NO.	Size	Maker
I-EXTB-1LB-TB	1LB(16OZ)	T&B
I-EXTB-1LB-MS	500g	Moelyslip

I-EXTB1 電氣補土
Duct Seal



I-EXID 拉線膏
Pulling Lubrecant



產品型號	規格	廠牌
Cat.NO.	Size	Maker
I-EXID-1GL-ID	1GL	Ideal
I-EXID-5GL-ID	5GL	Ideal
I-EXID-1GL-VT	1GL	Long Lub-tek
I-EXID-5GL-VT	5GL	Long Lub-tek

I-EXK1 防爆棉
Sealing Fibber



產品型號	規格	廠牌
Cat.NO.	Size	Maker
I-EXTB1-5LB-TB	5LB	T&B
I-EXTB1-1LB-ID	1LB	Ideal

產品型號	規格	廠牌
Cat.NO.	Size	Maker
I-EXK1-16OZ-KL	16OZ	Killark
I-EXK1-8OZ-CH	8OZ	Crouse-Hinds

1 用途

Applications

大的擴張倍率和內有熱熔膠提供了良好的絕緣和保護電纜連接和終端的性能，另外高抗磨性能和抗腐蝕性能可以很好的應用於通信電纜和管道。

High shrink ratio and hot melt adhesive, which provide excellent properties of insulation and protection to cable joints and terminations. And high abrasion and corrosion resistance for applying in communication cable and chemical pipe.

2 特性

Characteristic

- Shrinkable Ratio 3:1
收縮率 3:1
- Easily fit over irregular shape and large connectors
可以應用於不規則的連接上
- Resistant to UV and waterproof
能抵抗UV、防水
- Excellent electrical insulation
良好的電氣絕緣性能

3 操作溫度範圍

Operating Temperature Range

- Operating temperature : $-55^{\circ}\text{C} \sim 110^{\circ}\text{C}$
操作溫度： $-55^{\circ}\text{C} \sim 110^{\circ}\text{C}$
- Minimum shrink temperature : 80°C
最低收縮溫度： 80°C
- Minimum fully recovery temperature : 120°C
最低完全收縮溫度： 120°C



4 產品規格

Product Dimensions

單位: mm

產品型號 Cat.NO.	收縮前 As supplied	收縮後 After recovered		標準長度 Standard Length
	I.D內徑 Min.	I.D內徑 Max.	W.T.壁後 Min.	
ATM-8-2	8	2	1.7	1220
ATM-12-3	12	3	1.8	1220
ATM-16-5	16	5	2.0	1220
ATM-19-5	19	5	2.2	1220
ATM-22-6	22	6	2.2	1220
ATM-28-6	28	6	2.5	1220
ATM-33-8	33	8	2.5	1220
ATM-40-12	40	12	2.5	1220
ATM-44-14	44	14	2.5	1220
ATM-55-16	55	16	2.7	1220
ATM-65-19	65	19	2.8	1220
ATM-75-22	75	22	3.0	1220
ATM-85-25	85	25	3.0	1220
ATM-95-25	95	25	3.0	1220
ATM-115-34	115	34	3.3	1220
ATM-140-42	140	42	3.5	1220
ATM-160-50	160	50	3.5	1220
ATM-180-58	180	58	3.5	1220
ATM-205-65	205	65	3.5	1220
ATM-235-65	235	65	3.7	1220
ATM-265-75	265	75	4.0	1220
ATM-300-85	300	85	4.0	1220
ATM-350-100	350	100	4.3	1220
ATM-380-150	380	150	4.3	1220
ATM-410-150	410	150	4.3	1220

• Standard color: Black and Gray (Other colors, special size, cut pieces are available on request.)

標準顏色：黑色和灰色（其他顏色、其他尺寸、裁切可依客戶需求另行訂製）

5 技術性能

Technical Data

特性 Property	測試方法 Test Method	結果 Typical Value
Operating temperature 操作溫度	IEC 216	-55°C~+110°C
Tensile strength 張拉強度	ASTM D 2671	≥14 Mpa
Elongation at break 斷裂伸長率	ASTM D 2671	≥400%
Density 密度	ASTM D 792	1.05g/cm ³
Longitudinal shrinkage 縱向伸縮率	UL 224	0~10%
Eccentricity 偏心率	ASTM D 2671	<30%
Elongation at break after aging 老化斷裂伸長率	150°C, 168hrs	≥300%
Dielectric strength 絕緣強度	IEC 243	≥20KV/mm
Volume resistance 體積電阻率	IEC 93	≥10 ¹⁴ Ω.cm
Copper stability 銅穩定性	ASTM D 2671	Pass
Resistance to stress cracking (50°C) 壓力破裂抵抗性 (50°C)	ASTM D 1693	No cracking
Water absorption 吸水率	ISO 62	<0.15%
Thermoplastic Adhesive 熱熔膠		
Water absorption 吸水率	ISO 62	<0.2%
Softening point 軟化溫度	ASTM D E28	85°C
Peel strength (PE) 剝離強度 (PE)	DIN 30672	4N/cm
Copper stability 銅穩定性	ASTM D 2671	Non-corrosive
Resistance to fungus and decay 細菌腐蝕抵抗性	ISO 846	Pass



1 用途

Applications

適用於整廠設備，狹隘區間及機械電機之電氣配管。內管鍍鋅鐵皮製，外層被覆PVC，具防水防塵功能。單鉤結構

Apply to the electrical conduit for integrating machines, and mini zone, and mechanical motor. The inner conduit is made of iron metal with zinc plating and the outer face is plated with PVC, great performance for anti water and anti dust. Square-locked.

2 材質

Material

標準品內層為標準品有鍍鋅鐵皮和不鏽鋼，外層為PVC包覆

Standard Material:

Inner Conduit: Galvanized Steel Strip, SUS304 Strip

Outer Face: PVC Sheath

3 如何訂購

How to Order

選擇白鐵材質防水軟管後在產品編號後加上材質代碼“-S4”。例如：P-KA3-04-S4

For an optional material of KA3, add the suffix“-S4” to the end of Cat No.

Ex: P-KA3-04-S4

選擇鍍鋅鐵皮材質防水軟管則同產品型號

Galvanized steel strip material is the same as Cat.NO.



單位: mm

產品型號	規格	內徑 I.D		外徑 O.D		彎曲半徑	包裝
Cat.NO.	Conduit Size	Min.	Max.	Min.	Max.	Bend Radius	Length (M/coil)
P-KA3-03	3/8"	12.3	12.7	16.1	16.5	45	50
P-KA3-04	1/2"	15.7	16.1	19.9	20.3	55	50
P-KA3-06	3/4"	20.6	21	25.1	25.5	60	50
P-KA3-1	1"	26.4	26.8	31.1	31.5	80	50
P-KA3-12	1-1/4"	34.3	34.8	40	40.5	100	30
P-KA3-15	1-1/2"	39	39.5	45.6	46	115	25
P-KA3-2	2"	50.2	50.7	58.1	58.8	160	20
P-KA3-25	2-1/2"	62.9	63.9	71	72	190	10
P-KA3-3	3"	77	78	85.6	86.6	250	10
P-KA3-4	4"	100	101.5	110	111.5	300	10

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

- 適用於辦公室裝修，消防配電和廠房隔間的電氣配管
- 鍍鋅鐵皮製成，不具防水功能。單鉤結構
- Apply to electrical conduit for office decoration, fire power distribution, and manufacturing building rooms.
- Be made of iron with zinc plating, without waterproof function. Square-locked.

2 材質

Material

標準品有鍍鋅鐵皮和不鏽鋼
Standard Material:
Galvanized Steel Strip, SUS304 Strip

3 如何訂購

How to Order

選擇KU白鐵軟管材質後在產品編號後加上材質代碼“-S4”。例如：P-KU-04-S4

For an optional material of KU, add the suffix“-S4” to the end of Cat No.

Ex: P-KU-04-S4

選擇鍍鋅鐵皮材質軟管則同產品型號

Galvanized steel strip material is the same as Cat.NO.



單位: mm

產品型號	規格	內徑 I.D		外徑 O.D		彎曲半徑	包裝
Cat.NO.	Conduit Size	Min.	Max.	Min.	Max.	Bend Radius	Length (M/coil)
P-KU-03	3/8"	12.3	12.8	15.3	15.7	35	50
P-KU-04	1/2"	15.8	16.3	18.8	19.3	40	50
P-KU-06	3/4"	20.8	21.3	24.4	24.9	45	50
P-KU-1	1"	26.3	26.8	30.8	31.3	55	50
P-KU-12	1-1/4"	34.9	35.3	39.8	40.3	65	30
P-KU-15	1-1/2"	39.9	40.3	44.8	45.3	90	25
P-KU-2	2"	51.4	51.8	55.8	56.3	110	20
P-KU-25	2-1/2"	63.4	63.8	67.8	68.3	140	10
P-KU-3	3"	78.4	78.8	83.8	84.3	190	10
P-KU-4	4"	101.4	102.4	106.8	107.3	250	10

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

適用於重工機器，精密機械，潮濕區域，石化廠房，或長距離重負荷之電氣配管

Apply to heavy manufacturing, precise machine, humid area, petrified factory building, and the electrical conduit used for long travel route with heavy load capacity.

2 材質

Material

抗拉力防水軟管標準品內層為鍍鋅鐵皮軟管，3/8"~1"為嵌入化纖紗單鉤設計，1-1/4"~4"為雙鉤設計，外層為PVC包覆

Standard Material:

Inner Conduit: Galvanized Steel Strip

TKA(3/8"~1")Cord yarn scal squarelocked design

TKA(1-1/4"~4")Inter-locked design

Outer Face: PVC Sheath



單位: mm

產品型號	規格	內徑 I.D		外徑 O.D		彎曲半徑	包裝
Cat.NO.	Conduit Size	Min.	Max.	Min.	Max.	Bend Radius	Length (M/coll)
P-TKA-03	3/8"	12.3	12.8	17.7	18.2	65	50
P-TKA-04	1/2"	15.8	16.3	21	21.5	90	50
P-TKA-06	3/4"	20.8	21.3	26.5	27	115	30
P-TKA-1	1"	26.3	26.8	32.9	33.4	140	30
P-TKA-12	1-1/4"	34.9	35.3	41.8	42.3	180	20
P-TKA-15	1-1/2"	39.9	40.3	47.7	48.2	220	20
P-TKA-2	2"	51.4	51.8	59.7	60.2	260	15
P-TKA-25	2-1/2"	63.4	63.8	72.2	72.7	300	10
P-TKA-3	3"	78.4	78.8	87.7	88.2	380	10
R-TKA-4	4"	101.4	102.4	113.5	114	530	5

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

保曲佳軟管有優異的耐水性、耐腐蝕性、耐化學藥性，適用於室外電氣施工配管，船舶電氣設備等。該產品防火性能強，是用於防火要求較高的場所

PKA plica tube has excellent resistance to water, corrosion and chemical, that is suitable for wirings for outdoor and shipping's electrical devices. It can be used at the site of resistance to fire.

2 材質

Material

標準品為內層由鍍鋅鋼帶，鋼帶及電工紙構成的雙層金屬管，外層為PVC包覆

Standard Material:
Inner Conduit: Zine-plating steel strip, steel strip and insulation paper,

that has double metallic layers.

Outer Face: PVC Sheath



單位: mm

產品型號	規格	內徑	外徑	重量	包裝
Cat.NO.	Conduit Size	I.D	O.D	Kg/M	Length (M/coil)
P-PKA-04	1/2"	16.6	23.1	0.51	50
P-PKA-06	3/4"	23.8	30.4	0.8	25
P-PKA-1	1"	29.3	36.5	0.98	25
P-PKA-12	1-1/4"	37.1	44.9	1.26	25
P-PKA-15	1-1/2"	49.1	56.9	1.8	25
P-PKA-2	2"	62.6	71.5	2.38	10
P-PKA-25	2-1/2"	76	85.3	2.88	10
P-PKA-3	3"	81	90.9	3.41	10
P-PKA-4	4"	100.2	110.1	4.64	5

• Tolerance: ±2mm

1 用途

Applications

PKU非防水保曲佳軟管主要用於室內低壓電氣配線裝修，混凝土埋設，裝設電氣設備等，除特殊場所外，可與鋼製電線導管同樣施工

PKU plica tube is used in low-voltage electrical wiring, indoor decoration and electrical devices in main, except for special conditions, It can be used like as steel wire tube.

2 材質

Material

由鍍鋅鋼帶，鋼帶及電工紙構成的雙層金屬軟管

Standard Material:

Zinc-plating steel strip, steel strip and insulation paper, that has double metallic layers.



單位: mm

產品型號	規格	內徑	外徑	重量	包裝
Cat.NO.	Conduit Size	I.D	O.D	Kg/M	Length (M/coil)
P-PKU-04	1/2"	16.6	21.5	0.44	50
P-PKU-06	3/4"	23.8	28.8	0.56	25
P-PKU-1	1"	29.3	34.9	0.85	25
P-PKU-12	1-1/4"	37.1	42.9	0.98	25
P-PKU-15	1-1/2"	49.1	54.9	1.4	25
P-PKU-2	2"	62.6	69.1	2.1	10
P-PKU-25	2-1/2"	76	82.9	2.5	10
P-PKU-3	3"	81	88.1	2.7	10
P-PKU-4	4"	100.2	107.3	3.1	5

• Tolerance: ±2mm

KM型防水軟管盒接頭 KM Type Liquidtight Box Connectors

1 用途

Applications

與防水軟管搭配使用，用於固定進入箱殼的導管集線器

Use with liquidtight flexible conduit, and secure conduit hubs entering an enclosure.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Zinc Alloy / Zinc Electroplated / E - Stainless Steel 304 / S4
 鋅合金 / 電鍍鋅 / E 不鏽鋼SUS304 / S4
- Zinc Alloy / Hot Dip Galvanized / H1 - Stainless Steel 316 / S6
 鋅合金 / 熱浸鍍鋅 / H1 不鏽鋼SUS316 / S6
- Ductile iron / Hot Dip Galvanized / H - Aluminum Alloy / AL
 球墨鑄鐵 / 熱浸鍍鋅 / H 鋁合金 / AL

備註

Note

電鍍鋅/熱浸鍍鋅之鋅合金產品為標準品，其他材質 / 表面處理可接單生產

Standard Material: Zinc Alloy

Standard Finish: Zinc Electroplated/Hot Dip Galvanized

Other Material / Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P - NPT(美牙) / N


4 如何訂購

How to Order

選擇KM防水軟管盒接頭螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-E, H1, H, S4, S6, AL"。例如：P-KM-04P-AL、P-KM-06P-H...

For optional thread standards of KM, add the suffix"P,N" for thread to the end of Cat No., optional material of KM, add the suffix"-E, H1, H, S4, S6, AL" after the thread code.

Ex: P-KM-04P-AL, P-KM-06P-H...



產品型號	規格	尺寸 Dimensions (mm)			規格
Cat.NO.	Conduit Size	I.D	A	B	Hub Size
P-KM-03	3/8"	11.3	28	37	1/2"
P-KM-04	1/2"	14.8	32	37	1/2"
P-KM-06	3/4"	19.4	38	40	3/4"
P-KM-1	1"	25	45	44	1"
P-KM-12	1-1/4"	33.5	55	51	1-1/4"
P-KM-15	1-1/2"	38.5	62	52	1-1/2"
P-KM-2	2"	49.5	76	56	2"
P-KM-25	2-1/2"	60	95	68	2-1/2"
P-KM-3	3"	75	113	73	3"
P-KM-4	4"	98	141	80	4"

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

與防水軟管搭配使用，用於導管與防水軟管連接

Use with liquidtight flexible conduit, and Attach rigid conduit to liquidtight flexible conduit.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- | | |
|--|--|
| - Zinc Alloy / Zinc Electroplated / E
鋅合金 / 電鍍鋅 / E | - Stainless Steel 304 / S4
不鏽鋼SUS304 / S4 |
| - Zinc Alloy / Hot Dip Galvanized / H1
鋅合金 / 熱浸鍍鋅 / H1 | - Stainless Steel 316 / S6
不鏽鋼SUS316 / S6 |
| - Ductile iron / Hot Dip Galvanized / H
球墨鑄鐵 / 熱浸鍍鋅 / H | - Aluminum Alloy / AL
鋁合金 / AL |

備註

Note

電鍍鋅/熱浸鍍鋅之鋅合金產品為標準品，其他材質 / 表面處理可接單生產

Standard Material: Zinc Alloy

Standard Finish: Zinc Electroplated/Hot Dip Galvanized

Other Material / Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P - NPT(美牙) / N


4 如何訂購

How to Order

選擇KF防水軟管管接頭螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-E, H1, H, S4, S6, AL"。例如：P-KF-04P-AL、P-KF-06P-H...

For an optional thread standards of KF, add the suffix"P,N" for thread to the end of Cat No., optional material of KF, add the suffix"-E, H1, H, S4, S6, AL" after the thread code.

Ex: P-KF-04P-AL, P-KF-06P-H...



產品型號	規格	尺寸 Dimensions (mm)			規格
Cat.NO.	Conduit Size	I.D.	A	B	Hub Size
P-KF-03	3/8"	11.3	28	34	1/2"
P-KF-04	1/2"	14.8	32	35	1/2"
P-KF-06	3/4"	19.4	38	39	3/4"
P-KF-1	1"	25	45	45	1"
P-KF-12	1-1/4"	33.5	55	54	1-1/4"
P-KF-15	1-1/2"	38.5	62	54	1-1/2"
P-KF-2	2"	49.5	76	59	2"
P-KF-25	2-1/2"	60	95	70	2-1/2"
P-KF-3	3"	75	113	72	3"
P-KF-4	4"	98	141	74	4"

• Tolerance: ±5% (公差: ±5%)

KEMT型防水軟管EMT管用管接頭

KEMT Type Liquidtight Combination Connectors-EMT

1 用途

Applications

與防水軟管搭配使用，用於EMT導管與防水軟管連接

Use with liquidtight flexible conduit, and Attach EMT conduit to liquidtight flexible conduit.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Zinc Alloy / Zinc Electroplated / E
鋅合金 / 電鍍鋅 / E

- Aluminum Alloy / AL
鋁合金 / AL

備註

Note

電鍍鋅之鋅合金產品為標準品，其他材質 / 表面處理可接單生產

Standard Material: Zinc Alloy

Standard Finish: Zinc Electroplated

Other Material / Finish can be produced by order

3 如何訂購


How to Order

選擇KEMT防水軟管EMT用管接頭材質後在產品編號後加上材質代碼“-E, AL”。

例如：P-KEMT-04-E、P-KEMT-06-AL...

For optional material of KEMT, add the suffix“-E, AL” to the end of Cat No.

Ex: P-KEMT-04-E, P-KEMT-06-AL...



產品型號	規格	尺寸 Dimensions (mm)			規格
Cat.NO.	Conduit Size	I.D	A	B	Hub Size
P-KEMT-03	3/8"	11.3	28	35	1/2"
P-KEMT-04	1/2"	14.8	32	35	1/2"
P-KEMT-06	3/4"	19.4	38	40	3/4"
P-KEMT-1	1"	25	45	45	1"
P-KEMT-12	1-1/4"	33.5	55	52	1-1/4"
P-KEMT-15	1-1/2"	38.5	62	54	1-1/2"
P-KEMT-2	2"	49.5	76	59	2"
P-KEMT-25	2-1/2"	60	95	74	2-1/2"
P-KEMT-3	3"	75	113	75	3"
P-KEMT-4	4"	96	141	80	4"

• Tolerance: $\pm 5\%$ (公差: $\pm 5\%$)

KBUI Type Guide Collar For All Kinds Of Flexible Conduit

1 用途

Applications

用於保護各種柔性導管的端口

For protecting edges of all kinds of flexible conduit.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Steel / Zinc Electroplated / E

鋼 / 電鍍鋅 / E

- Stainless Steel 304 / S4

不鏽鋼SUS304 / S4

備註

Note

電鍍鋅鋼和不鏽鋼產品為標準品

Standard Material: Steel / SUS304

Standard Finish: Zinc Electroplated/ Natural

3 如何訂購

How to Order

選擇KBUI管端護套材質後在產品編號後加上材質代碼"-E, S4"。

例如：P-KBUI-04-E、P-KBUI-06-S4

For optional material of KBUI, add the suffix "-E, S4" to the end of Cat No. Ex: P-KBUI-04-E, P-KBUI-06-S4



產品型號	規格	尺寸 Dimensions (mm)
Cat.NO.	Conduit Size	I.D
P-KBUI-03	3/8"	11.3
P-KBUI-04	1/2"	14.8
P-KBUI-06	3/4"	19.4
P-KBUI-1	1"	25
P-KBUI-12	1-1/4"	33.5
P-KBUI-15	1-1/2"	38.5
P-KBUI-2	2"	49.5
P-KBUI-25	2-1/2"	60
P-KBUI-3	3"	75
P-KBUI-4	4"	98

* Tolerance: ±5% (公差: ±5%)

KNB90型防水軟管90°盒接頭

KNB90 Type Liquidtight 90° Box Connectors

1 用途

Applications

與防水軟管搭配使用，用於固定進入箱殼的導管集線器

Use with Liquidtight flexible conduit, and secure conduit hubs entering an enclosure.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

– Zinc Alloy / Zinc Electroplated / E

鋅合金 / 電鍍鋅 / E

– Zinc Alloy / Hot Dip Galvanized / H1

鋅合金 / 熱浸鍍鋅 / H1

– Ductile Iron / Hot Dip Galvanized / H

球墨鑄鐵 / 熱浸鍍鋅 / H

備註

Note

電鍍鋅鋅合金產品為標準品，其他材質 / 表面處理可按單生產

Standard Material: Zinc Alloy / Standard Finish: Zinc Electroplated

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

– BSPT(英牙) / P

– NPT(美牙) / N


4 如何訂購

How to Order

選擇KNB防水軟管90盒接頭螺紋後在產品編號後加上螺紋代碼“P,N”，選擇材質後在螺紋編號後加上材質代碼“-E, H”。例如：P-KNB90-04P-E、P-KNB90-06P-H...

For optional thread standards of KNB90, add the suffix“P,N” for thread to the end of Cat No., optional material of KNB90, add the suffix“-E, H” after the thread code.

Ex: P-KNB90-04P-E, P-KNB90-06P-H...



產品型號	規格	尺寸 Dimensions (mm)			規格
Cat.NO.	Conduit Size	I.D	A	B	Hub Size
P-KNB90-03	3/8"	11.3	27	36	1/2"
P-KNB90-04	1/2"	14.8	32	36	1/2"
P-KNB90-06	3/4"	19.4	39	46	3/4"
P-KNB90-1	1"	25	46	55	1"
P-KNB90-12	1-1/4"	33.5	56	62	1-1/4"
P-KNB90-15	1-1/2"	38.5	63	72	1-1/2"
P-KNB90-2	2"	49.5	77	82	2"
P-KNB90-25	2-1/2"	60	96	94	2-1/2"
P-KNB90-3	3"	75	114	101	3"
P-KNB90-4	4"	98	141	121	4"

• Tolerance: ±5% (公差: ±5%)

KNB45型防水軟管45°盒接頭

KNB45 Type Liquidtight 45° Box Connectors

1 用途

Applications

與防水軟管搭配使用，用於固定進入箱殼的導管集線器

Use with liquidtight flexible conduit, and secure conduit hubs entering an enclosure.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

- Zinc Alloy / Zinc Electroplated / E

鋅合金 / 電鍍鋅 / E

- Zinc Alloy / Hot Dip Galvanized / H1

鋅合金 / 熱浸鍍鋅 / H1

- Ductile Iron / Hot Dip Galvanized / H

球墨鑄鐵 / 熱浸鍍鋅 / H

備註

Note

電鍍鋅鋅合金產品為標準品，其他材質 / 表面處理可接單生產

Standard Material: Zinc Alloy / Standard Finish: Zinc Electroplated

Other Material/Finish can be produced by order

3 螺紋 / 代碼

Thread Standards / Code

- BSPT(英牙) / P

- NPT(美牙) / N


4 如何訂購

How to Order

選擇KNB防水軟管45盒接頭螺紋後在產品編號後加上螺紋代碼"P,N"，選擇材質後在螺紋編號後加上材質代碼"-E, H"。例如：P-KNB45-04P-E、P-KNB45-06P-H...

For optional thread standards of KNB45, add the suffix "P,N" for thread to the end of Cat No., optional material of KNB45, add the suffix "-E, H" after the thread code.

Ex: P-KNB45-04P-E, P-KNB45-06P-H...



產品型號	規格	尺寸 Dimensions (mm)				規格
Cat.NO.	Conduit Size	I.D.	A	H	Hub Size	
P-KNB45-03	3/8"	11.3	27	40	1/2"	
P-KNB45-04	1/2"	14.8	32	48	1/2"	
P-KNB45-06	3/4"	19.4	39	57	3/4"	
P-KNB45-1	1"	25	46	64	1"	
P-KNB5-12	1-1/4"	33.5	56	74	1-1/4"	
P-KNB5-15	1-1/2"	38.5	63	78	1-1/2"	
P-KNB45-2	2"	49.5	77	91	2"	
P-KNB45-25	2-1/2"	60	96	110	2-1/2"	
P-KNB45-3	3"	75	114	132	3"	
P-KNB45-4	4"	98	141	156	4"	

• Tolerance: ±5% (公差: ±5%)

PKM型保曲佳防水軟管盒接頭

PKM Type Plica Liquidtight Box Connectors

1 用途

Applications

與保曲佳防水軟管搭配使用，用於固定進入箱殼的導管集線器

Use with Plica liquidtight flexible conduit, and secure conduit hubs entering an enclosure.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

– Zinc Alloy / Zinc Electroplated / E

鋅合金 / 電鍍鋅 / E

備註

Note

電鍍鋅之鋅合金產品為標準品

Standard Material: Zinc Alloy

Standard Finish: Zinc Electroplated

3 如何訂購


How to Order

選擇PKM防水保曲佳軟管盒接頭材質後在產品編號後加上材質代碼“-E”。

例如：P-PKM-04-E

For optional material of PKM, add the suffix“-E” to the end of Cat No.

Ex: P-PKM-04-E



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Conduit Size	A	B
P-PKM-04	1/2"	37	39
P-PKM-06	3/4"	46	42
P-PKM-1	1"	54	49
P-PKM-12	1-1/4"	64	53
P-PKM-15	1-1/2"	78	66
P-PKM-2	2"	92	62
P-PKM-25	2-1/2"	108	66
P-PKM-3	3"	122	69
P-PKM-4	4"	145	90

• Tolerance: ±5% (公差: ±5%)

PKF Type Plica LiquidtightCombination Connectors–Female

1 用途

Applications

與保曲佳防水軟管搭配使用，用於導管與保曲佳防水軟管連接

Use with plica liquidtight flexible conduit, and attach rigid conduit to plica liquidtight flexible conduit.

2 材質 / 表面處理 / 代碼

Material / Finish / Code

– Zinc Alloy / Zinc Electroplated / E
鋅合金 / 電鍍鋅 / E

備註

Note

電鍍鋅之鋅合金產品為標準品

Standard Material: Zinc Alloy

Standard Finish: Zinc Electroplated


3 如何訂購

How to Order

選擇PKF防水保曲佳軟管管接頭材質後在產品編號後加上材質代碼“-E”。
例如：P-PKF-04-E


For optional material of PKF, add the suffix“-E” to the end of Cat No.

Ex: P-PKF-04-E



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Conduit Size	A	B
P-PKF-04	1/2"	37	46
P-PKF-06	3/4"	46	52
P-PKF-1	1"	54	58
P-PKF-12	1-1/4"	64	65
P-PKF-15	1-1/2"	78	66
P-PKF-2	2"	92	78
P-PKF-25	2-1/2"	108	84
P-PKF-3	3"	122	89
P-PKF-4	4"	145	97

• Tolerance: ±5% (公差: ±5%)

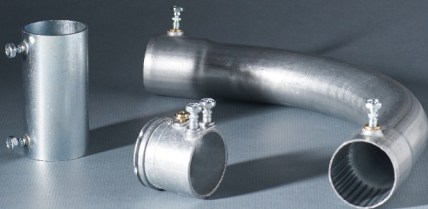

EMT無螺紋(薄)電線鋼管 EMT-Rigid Steel Conduits

CNS2606 / C4060



產品型號	規格	尺寸 Dimensions (mm)					重量
Cat.NO.	Conduit Size	外徑 O.D.	外徑容許差 Tolerance on O.D.	近似內徑 Approx I.D.	厚度 Thickness	長度 Length	Weight Kg/M
E-EMT-04	E19	19.1	±0.15	16.7	1.2	3660	0.53
E-EMT-06	E25	25.4	±0.15	23	1.2	3660	0.72
E-EMT-1	E31	31.8	±0.15	29	1.4	3660	1.05
E-EMT-12	E39	38.1	±0.15	35.3	1.4	3660	1.27
E-EMT-15	E51	50.8	±0.15	48	1.4	3660	1.71
E-EMT-2	E63	63.5	±0.15	60.3	1.6	3660	2.44
E-EMT-25	E75	76.2	±0.15	72.6	1.8	3660	3.3

EMT-M EMT喇叭口式盒接頭 EMT Box Connectors

1 用途

Applications

EMT盒接頭用於使EMT導管通過並固定於箱殼上

EMT box connectors are used to pass and fix the EMT conduit to the walls of sheet metal enclosures.

2 材質 / 表面處理

Material / Finish

標準材料：鋁合金 / 標準表面處理：x

Standard Material: Aluminum Alloy / Standard Finish: Natural



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	內徑 I.D.	厚度 Thickness
E-M-04	E19 (1/2")	19.6	2
E-M-06	E25 (3/4")	25.9	2
E-M-1	E31 (1")	32.3	2
E-M-12	E39 (1-1/4")	38.6	2
E-M-15	E51 (1-1/2")	51.3	2.5
E-M-2	E63 (2")	64.2	2.5
E-M-25	E75 (2-1/2")	76.9	2.5

• Tolerance: ±5% (公差: ±5%)

EMT-F EMT管接頭(EMT Couplings)

1 用途

Applications

EMT管接用於EMT電線用導管間連接

EMT Couplings are used to connect two pieces of EMT rigid conduit.

2 材質 / 表面處理

Material / Finish

標準材料：鋼 / 標準表面處理：電鍍鋅

Standard Material: Steel / Standard Finish: Zinc Electroplated



產品型號	規格	尺寸 Dimensions (mm)	
Cat.NO.	Hub Size	內徑 I.D	厚度 Thickness
E-F-04	E19 (1/2")	19.6	1.45
E-F-06	E25 (3/4")	25.9	1.6
E-F-1	E31 (1")	32.3	1.6
E-F-12	E39 (1-1/4")	38.6	1.8
E-F-15	E51 (1-1/2")	51.3	1.8
E-F-2	E63 (2")	64.2	1.8
E-F-25	E75 (2-1/2")	76.9	2.6

• Tolerance: ±5% (公差: ±5%)

E-NB EMT 90° / E-NB45 EMT 45°彎管 EMT Normal Bends 90° / 45°

1 用途

Applications

EMT 90度/45度彎管用於連接EMT管

EMT 90°/45° Elbow is used to connect two piece of EMT-rigid conduits.

2 材質 / 表面處理

Material / Finish

標準材料：鋼 / 標準表面處理：電鍍鋅

Standard Material: Steel / Standard Finish: Zinc Electroplated



產品型號	規格	尺寸 Dimensions (mm)
Cat.NO.	Conduit Size	R
E-NB-04	E19 (1/2")	130
E-NB-06	E25 (3/4")	130
E-NB-1	E31 (1")	155
E-NB-12	E39 (1-1/4")	165
E-NB-15	E51 (1-1/2")	165
E-NB-2	E63 (2")	290
E-NB-25	E75 (2-1/2")	320

• Tolerance: ±5% (公差: ±5%)

產品型號	規格	尺寸 Dimensions (mm)
Cat.NO.	Conduit Size	R
E-NB45-04	E19 (1/2")	130
E-NB45-06	E25 (3/4")	130
E-NB45-1	E31 (1")	155
E-NB45-12	E39 (1-1/4")	165
E-NB45-15	E51 (1-1/2")	165
E-NB45-2	E63 (2")	290
E-NB45-25	E75 (2-1/2")	320

• Tolerance: ±5% (公差: ±5%)

1 用途

Applications

設計用於固定EMT電線導管垂直於通道，鋼樑和角度支撐

Designed to secure EMT rigid metal conduit perpendicular to channel, beam and angle supports.

2 材質 / 表面處理

Material / Finish

標準材料：鋼

標準表面處理：電鍍鋅

Standard Material: steel

Standard Finish: Zinc Electroplated



產品型號		規格
Cat.NO.	Conduit Size	
E-ERA-04-06	E19~E25	
E-ERA-1-15	E31~E51	
E-ERA-2-25	E63~E75	

EMT鋁製接線盒 Aluminum Conduit Outlet Boxes

1 用途

Applications

容納接線裝置並提供電纜線之分線與拉線

Accommodates wiring devices and provides opening to splice, tap, or pull conductors.

2 材質 / 表面處理

Material / Finish

標準材料：鋁合金

標準表面處理：x

Standard Material: Aluminum Alloy

Standard Finish: Natural



產品型號	型式
Cat.NO.	Type
E-ABOX1-AL	單聯
E-ABOX2-AL	雙聯

• Tolerance: ±5% (公差: ±5%)



盟諭實業有限公司
MONG YU ENTERPRISE

高雄市林園區中門路85號
No.85, Zhongmen Rd., Linyuan Dist., Kaohsiung City 832, Taiwan

TEL +886-7-6428383 FAX +886-7-6427575

E-mail service@mongyu.com.tw

WEB www.mongyu.com.tw

